






DNH5 STRIP-TYPE FUSE SWITCH DISCONNECTOR/DFS VERTICAL STRIP WAY BASE

		DNH5-160	DFS-160	DNH5-250	DFS-250	DNH5-400	DFS-400	DNH5-630	DFS-630
Type		Simultaneous Disconnector	Vertical strip base	Simultaneous Disconnector	Vertical strip base	Simultaneous Disconnector	Vertical strip base	Simultaneous Disconnector	Vertical strip base
Steady Current (Iu)		160 A		250 A		400 A		630 A	
Rated operating current	500V	160 A		250 A		400 A		630 A	
	690V	100 A		200 A		315 A		500 A	
Breaking capacity for short circuit		50 kA		80 kA		80 kA		80 kA	
Rated voltage (Ue)		500V/690V		500V/690V		500V/690V		500V/690V	
Impulse voltage (Uimp)		8kV		12kV		12kV		12kV	
Isolation Voltage		750V		1000V		1000V		1000V	
Mechanical life (operations)		1700		1400		1400		800	
Operating Temperature		-25°C ~ +55°C		-25°C ~ +55°C		-25°C ~ +55°C		-25°C ~ +55°C	
connecting conductors	- Cables with terminal	(1x) 10 a 95mm ²		(1x) 25 a 150mm ²		(1x) 25 a 240mm ²		(1x) 25 a 300mm ²	
	- Busbars	20mm x 10mm		30mm x 10mm		30mm x 10mm		40mm x 10mm	
Screw terminal		Hexagonal type, size M8		Hexagonal type, size M12		Hexagonal type, size M12		Hexagonal type, size M12	

Modelo	A	a1	a2	B	b	C	D	E	F	G	H	I	J
DNH5-160	302	100	***	95	***	50	84	34	20	46	78	115	120
DNH5-250	621	193	180	58	78	96	146	51	100	76	146	174	***
DNH5-400	621	193	180	58	78	96	146	51	100	76	146	174	***
DNH5-630	621	193	180	58	78	96	146	51	100	76	146	174	***

Modelo	A	a1	a2	a3	B	C	D
DFS-160	362	11	100	100	65	27	66
DFS-250	656	***	195	175	99	51	119
DFS-400	656	***	195	175	99	51	119
DFS-630	656	***	195	175	99	51	119

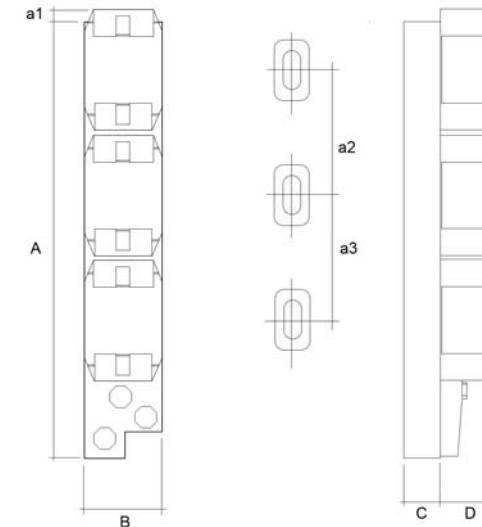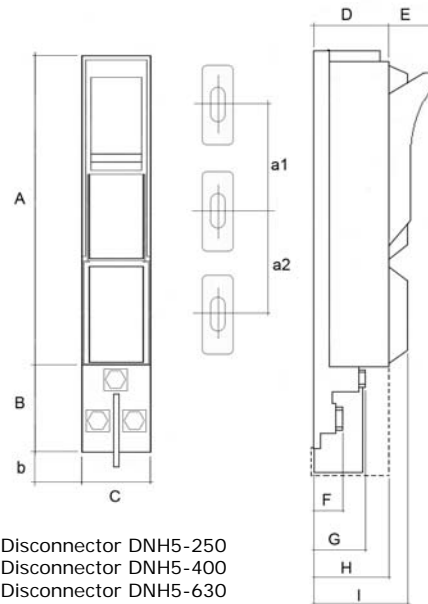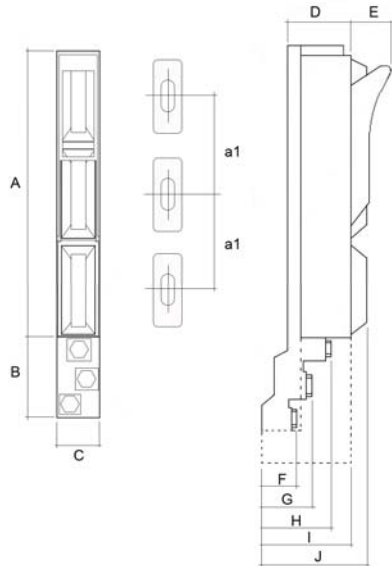

Seccionadora DNH5-160

Base vertical DFS-160/250/400/630